


# HTW90


Series  
Actuators

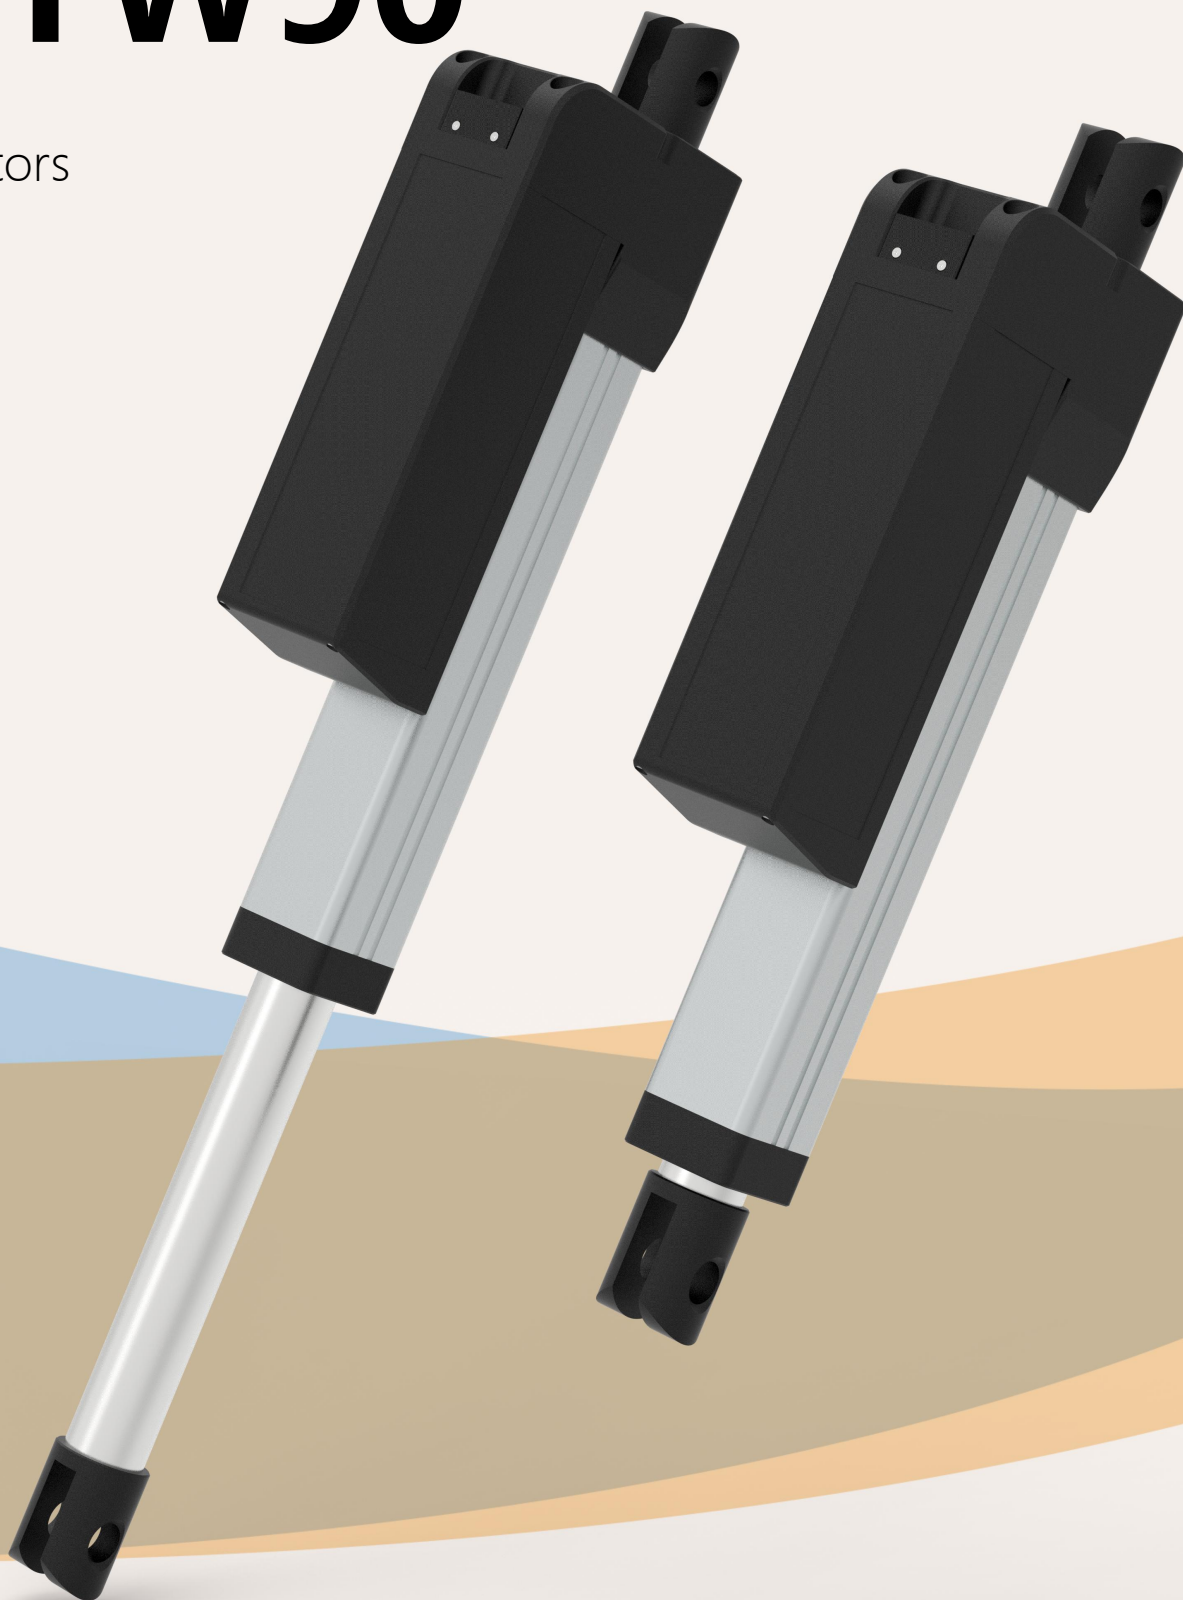

# HTW90

## Series

Linear Actuators

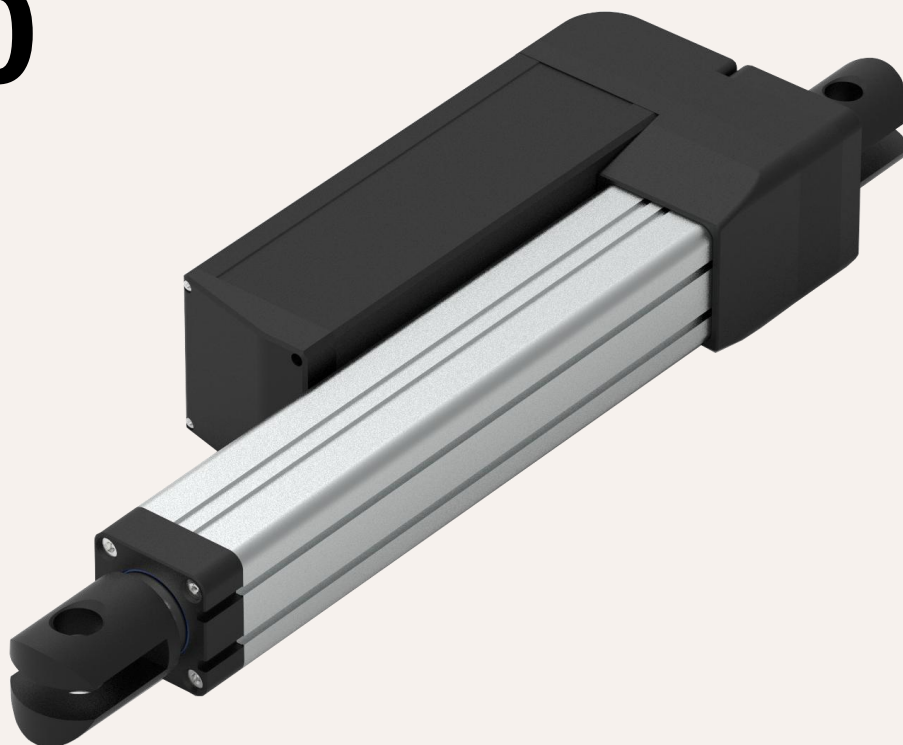

### Product Category

- 1、 Industrial application
- 2、 Military application
- 3、 Agricultural machinery
- 4、 Mining applications

HTW90 is a push rod designed for heavy industrial environments with high loads, especially for some mechanical equipment with high wear and tear, such as agricultural machinery and industrial application equipment. If you are looking for a push rod that can be used in harsh industrial environments and must meet strict specifications and standards, the smart electromechanical actuator is equipped with onboard electronic components and does not require a separate control system. With higher loads up to 50 kN, it opens up more possibilities for hydraulic to electric applications.

### Functional Overview

Voltage:	48V DC, 220V AC
Motor options:	DC motor, brushless DC motor
Maximum thrust (pull force):	500,000N / 50,000N
Slowest speed under load:	8.0mm/s (load 50,000N)
Maximum speed under load:	100 mm/s (load 4,000N)
Minimum installation size:	Stroke + 300mm
Dynamic lateral moment:	1,000Nm
Static lateral moment:	800Nm
color:	Silver gray, black
Voice:	60~75 DB
Adaptable temperature range:	-45°C ~ +75°C
Protection level:	IP67
Screw selection:	I ball screw, trapezoidal screw
Switch type:	Built-in limit switch,
Signal options:	Potentiometer, Hall sensor, endpoint signal
Control options:	Synchronous control, independent control,
safety certificate:	integrated control, CAN bus control,
	Comply with ISO9001-2008,
	CE and RoHS regulations,
High-strength metal zinc alloy gearbox and housing,	

## Electrical conversion trend accelerates

Easier installation, better control and less complexity

Installation is simpler, smaller and faster

Easier control and greater precision

**Electric execution requires fewer components and is faster and easier** to install than hydraulic or pneumatic systems

- Component costs are lower than comparable cost hydraulic or pneumatic systems
- Smaller footprint simplifies and speeds design

## Easier control and greater precision

- Fully electrical components mean easier integration, fewer control components and less complexity
- Electric actuators react faster, more predictably, and won't drift when power is turned off

## Reduce energy costs


- Electric motors are inherently more efficient than pneumatic or hydraulic motors
- Consider potential parasitic power consumption without scaling up existing systems
- No need for any power supply to maintain load reducing power consumption

## Reduce maintenance

- No use of hydraulic pumps, valves or hoses to reduce downtime, repair parts and replacement
- Stand-alone device electronics with smart onboard equipment requiring zero maintenance and increasing design flexibility for component placement
- Electric execution eliminates the cost and hassle associated with fluid maintenance



***NEW!***

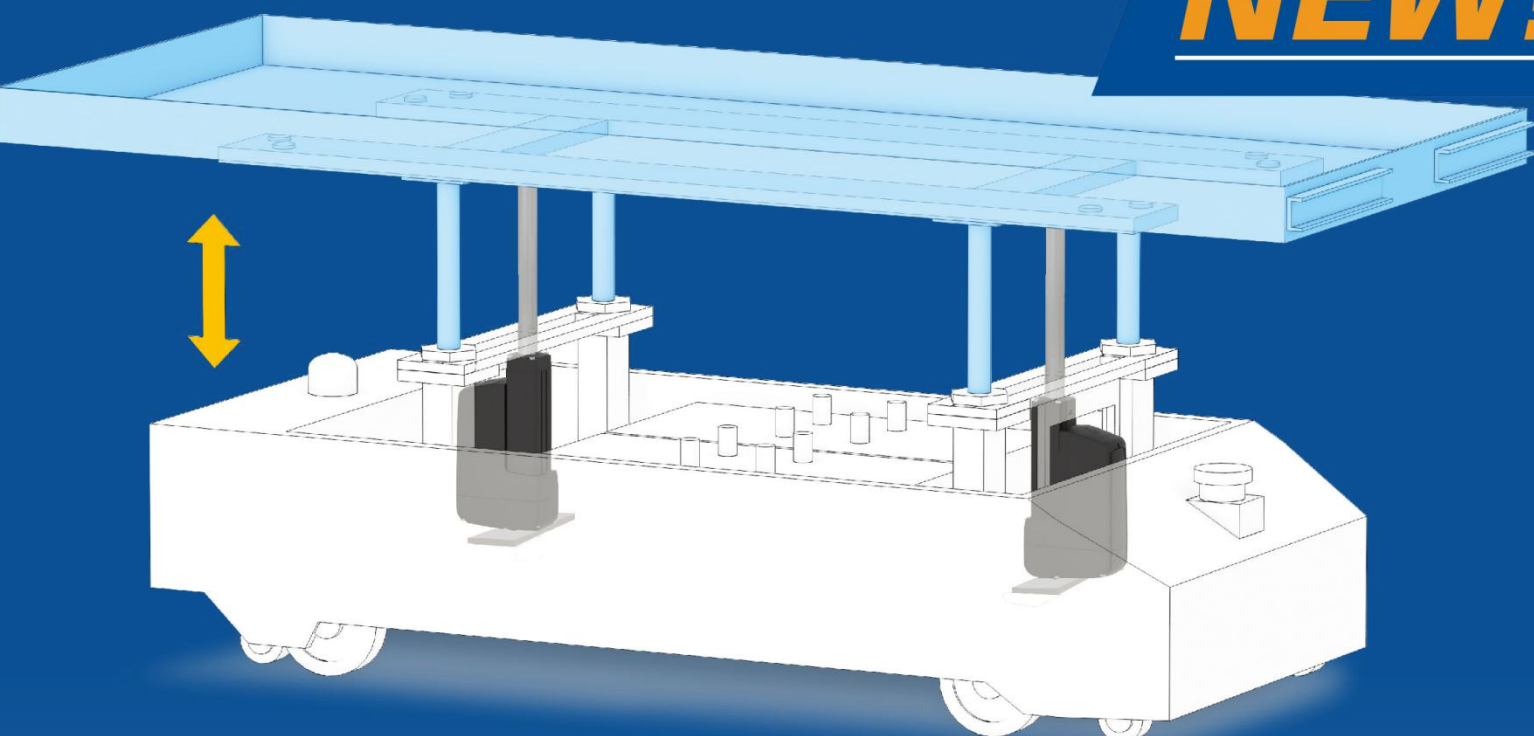

## Rear installation can be retrofitted with flange installation

Electric linear actuators for automated guided vehicles, mobile equipment and industrial automation

height adjustment

Positioning adjustment

More compact design,

making it easier to install in small spaces,


Very suitable for designing different types of automation equipment,

unmanned trucks and lifting equipment,

All while retaining many of the benefits that make it so popular!

## Drawings

Standard size  
MM

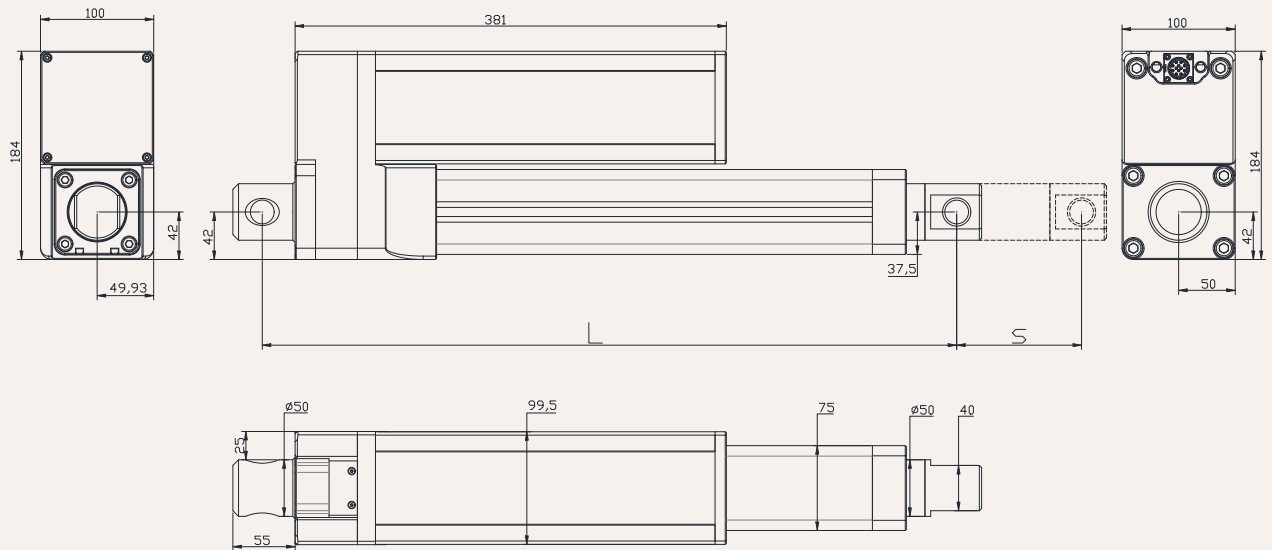

S: Stroke

L: Retracted length



L = Stroke + 300mm

Greater than 600MM stroke, installation dimensions L = Stroke + 350MM

Installation angle (counterclockwise):

0 = 0 Degrees

9 = 90 Degrees

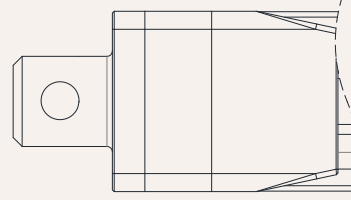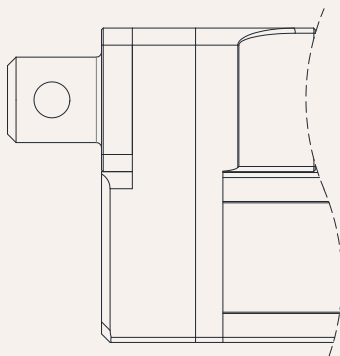

## load and speed

Code	Rated load Thrust N	Pull N	Self-locking force static conditions static N	Rated load current A	Output speed no load 24V DC mm/s	Rated load 24V DC mm/s
Motor voltage (24V DC)						
A	50,000	40,000	60,000	17.5	8.5	7.0
B	40,000	40,000	50,000	17.5	10	8.0
C	33,000	33,000	40,000	17.5	12	10
D	27,000	27,000	30,000	17.5	15	13.
E	17,000	17,000	20,000	17.5	25	22
F	14,000	14,000	20,000	17.5	31	27
G	9,500	9,500	10,000	17.5	41	36
H	7,500	7,500	8,000	17.5	50	45
I	5,500	5,500	7,000	17.5	62	55
J	4,500	4,500	6,000	17.5	83	75
A	50,000	40,000	60,000	17.5	8.5	7.0

### Remark

1. The speed and current on the upper side are the materials that extend when pushed.
2. For 24V motor, the speed is about the same and the current is about 2 times higher.
3. The current & speed in the table are the test average values in the extension direction under thrust application.
4. The current & speed in the table and graph are the test average values of the GeMinG control box configuration, and there is an error of about 10% depending on the control box model.  
(The voltage is about 56V DC at no load, and drops to about 48V DC at rated load)

Stroke: minimum value  $\geq 20\text{mm}$ , please refer to the table below for the maximum value of load and stroke

load (N)	Maximum stroke (mm)
50000	50-200
30000	201-600
20000	601-1200


**Remark:**

Lateral moment Y direction =  $X \times 0.8$

Static lateral moment = dynamic  $\times 2$

Dynamic lateral moment (Nm)-X direction

stroke	S+300	S+350
100-200	300	400
300-500	250	350
500-700	200	300
700-900	100	200

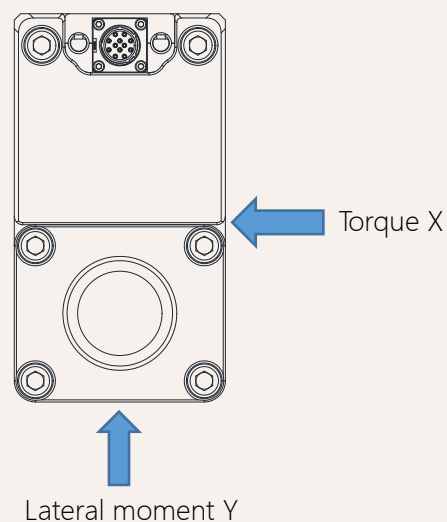

**Stroke installation size reference chart**

HTL2 Series	stroke $\pm 2$ (mm)					Install $\pm 2$ (mm)				
strokeMM	100	150	200	250	300	350	400	450	500	
Install MM	350	400	450	500	550	600	650	700	750	
weight KG	8.5	8.8	9.1	9.4	9.7	10.1	10.5	10.9	11.5	

## Actuator electrical specifications

Input voltage:	V DC	24,48
	V AC	220
Voltage range: 24	V DC	18-32
Voltage range: 48	V DC	36-60
Voltage range: 220	V AC	180-240
Current consumption:	A	8-28
24		6-16
Current consumption:		1-5
48		
Current consumption:		
220		
Power cord fixing terminal	M4	
Signal connector type	HS16N10S	



- 1 Gearbox
- 2 Power supply terminal
- 3 Signal connector
- 4 Tail Mount Connector
- 5 Wiring dust box
- 6 Motor protection cover




\* Control signal connector and power wiring location



## Signal feedback An electrical signal & No electrical signal

Passive or active endpoint signal wiring diagram

Code: N passive signal, Code: Y active signal

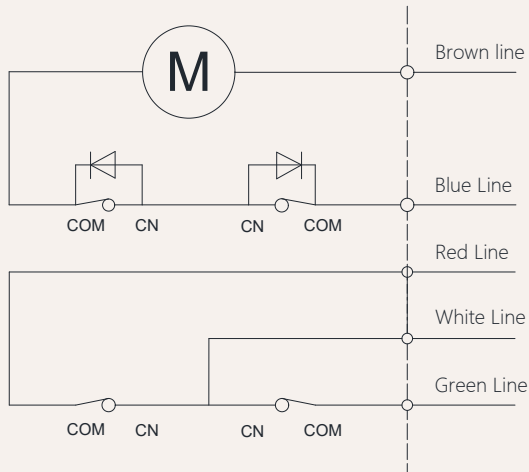


Wiring Instructions:

- 1] Brown lead: positive pole of motor +
- 2] Blue lead: negative pole of motor -
- 3] When the push rod is extended: brown wire positive pole +, blue wire negative pole -
- 4] When the push rod is retracted: blue wire positive pole +, brown wire negative pole -
- 5] White wire: signal output common line.
- 6] White and red wire: extension end signal,
- 7] White and green wire: retraction end signal,

## Signal feedback CAN bus

CANCommunication motor circuit diagram

Code: CN

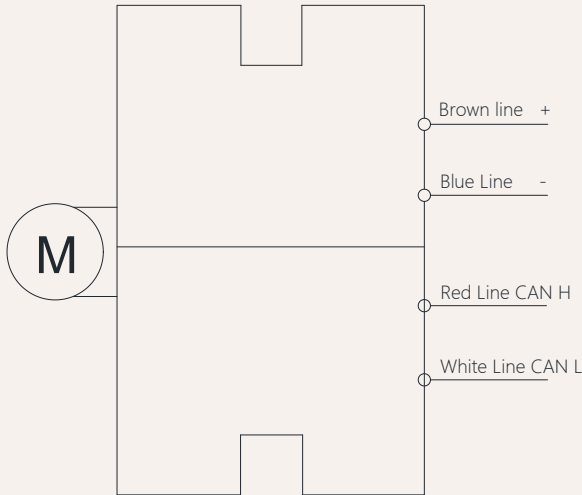

Wiring Instructions:


- 1] Brown lead: positive pole of motor +
- 2] Blue lead: negative pole of motor -
- 3] Red lead: CAN H
- 5] White lead: CAN L

Note:

1. The brown\blue power cord cannot be reversed, otherwise the driver may be burned.
2. With CAN bus, excluding terminal resistor: compliant with J1939
3. Speed: Baud rate: 500kbps

Communication wiring: shielded twisted pair  
Cable impedance: 120Ω (+10%)

CAN Control instructions

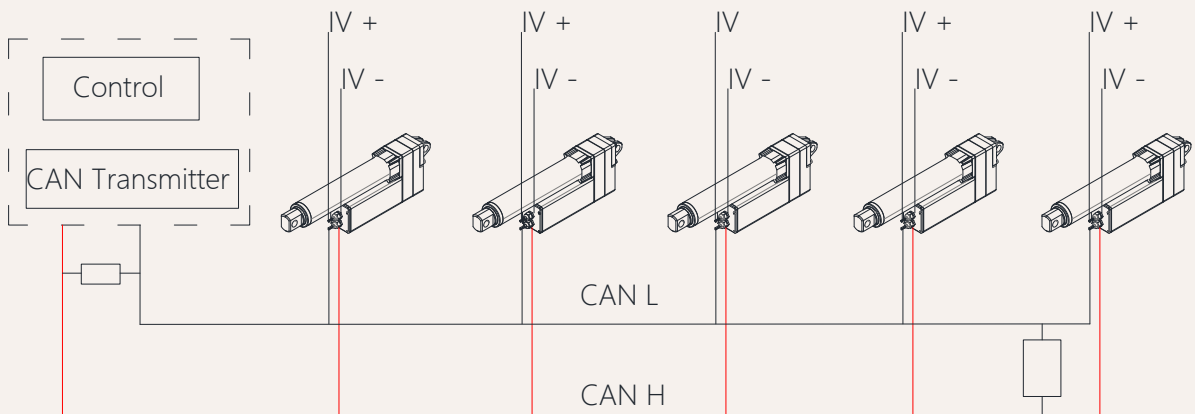

# HTW90 Model Description Selection Code Table


HTW90   -   48   A   \*\*\*   \*\*\*   -   O1   O1   0   1   T   A   N   07  
 ①   ②   ③   ④   ⑤   ⑥   ⑦   ⑧   ⑨   ⑩   ⑪   ⑫   ⑬

①	Product number	HTW90			
②	Voltage	48=48V DC	72=72V DC	22=220V AC	
③	Load(n)@Speed (mm/s)	<a href="#">See page 06</a>			
④	Stroke(mm)	<a href="#">See page 06</a>			
⑤	Installation size(mm)	Note: Before selecting a size, please refer to the valid data sheet! See page 05			
⑥	Upper type <a href="#">See page 13</a>	O1 = Ordinary type, hole diameter 20.5mm U1 = groove width 15.5mm, hole diameter 20.5mm M1 = Type M, M25 thread, depth 20 mm T1 = T-type, M25 thread, length 20mm L1 = L shape, width 25mm, aperture 20.5mm G1 = Spherical bearing, bore 20mm, model GS20		O2 = Ordinary type, hole diameter 25.5mm U2 = Groove width 1.5mm, hole diameter 25.5mm M2 = Type M, M30 thread, depth 20 mm T2 = T-type, M30 thread, length 20mm L2 = L shape, width 30mm, aperture 25.5mm G2 = Spherical bearing, bore 25mm, model GS25	
⑦	lower type <a href="#">See page 14</a>	O1 = Ordinary type, hole diameter 20.5mm P1 = Flat surface mounting		O2= Ordinary type, hole diameter 22.5mm KZ = Customized	
⑧	Installation angle (counterclockwise)	0 =0°, Degree		9 =90°, Degree	
⑨	Please refer to the outlet type	1 = 1 2-core bare wire 7 = 1 2-core, 1 5-core bare wire 4 = 4-pin straight plug 0 = Customized	5 = 1 5-core bare wire 2 = OI plug 9 = 6-pin straight plug	6 = 1 6-core bare wire 3 = 4-pin angled plug 8 = Waterproof plug	
⑩	Lead screw options	G=Ball screw (default preferred)		T = Trapezoidal screw	
⑪	Control method	A = No control T = Synchronous control	C = CAN bus D = Customized	Y =Integrated wired control	N=Integrated wireless control
⑫	Signal output options	N = None W=passive signal	H = Hall sensor AN = CAN communication	D = Potentiometer signal	U=active signal
⑬	Cable length	07 =Cable length 0.7 M 30 =Cable length 3.0 M 70 =Cable length 7.0 M	10 = Cable length 1.0 M 40 =Cable length 4.0M 70 =Cable length 8.0 M	15 =Cable length 1.5 M 50 =Cable length 5.0 M 90 =Cable length 9.0 M	20= Cable length 2.0 M 60= Cable length 6.0M 00 =Customization


# HTW90 Attachment Description Selection Code Table

Upper end form (extended):


O1=Ordinary type, hole diameter 20.5mm




O2=Ordinary type, hole diameter 25.5mm




U1 = groove width 19.5mm, hole diameter 20.5mm




U2 = groove width 19.5mm, hole diameter 25.5mm




M1 = Type M, M30 thread, depth 20 mm




M2 = Type M, M35 thread, depth 20 mm




T1 = T-type, M30 thread, length 20mm




T2 = T-type, M35 thread, length 20mm




L1 = L shape, width 40mm, aperture 20.5mm




L2 =L shape, width 40mm, aperture 25.5mm



G1 = Spherical bearing, bore 20mm, model GS20




G1 = Spherical bearing, bore 30mm, model GS30




KZ = Customized

# Power Cord Plug Type Code Table


1 = Bare wire

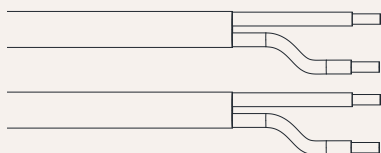


2 = O1 Straight plug




3 = 4-pin angled plug




4 = 4-pin straight plug

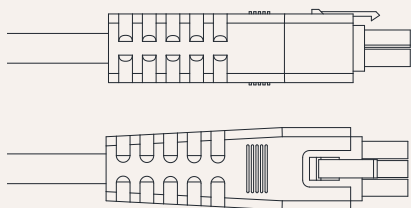

8 = Waterproof plug

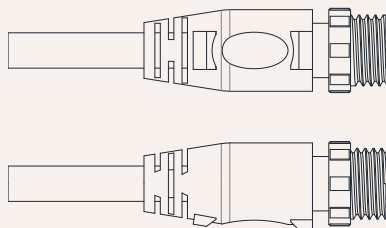

9 = 6-pin straight plug

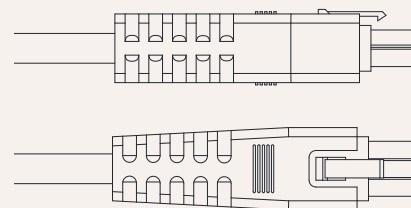

0 = Customized

## Terms of Use

The user is responsible for determining the suitability of GeMinG products for a specific application.

GeMinG products are subject to change without prior notice.